



# Air Guardian<sup>2</sup>

With Replaceable Desiccant Cartridge

Using the Air Guardian<sup>2</sup> is the simplest and most reliable method to remove water vapor and oil from compressed air lines.

Water vapor and oil in the compressed air lines is the leading cause of paint imperfections and damage to pneumatic tools.



## FEATURES

- Replaceable desiccant cartridge with built-in moisture indicator that lets you know when to change the desiccant cartridge.
- Coalescing filter removes oil vapor and mist from the compressed air.
- Particulate filter removes all particulates in the compressed air.
- Indestructible nylon housing.
- 3 year warranty.

## PERFORMANCE


- Removes moisture vapor down to 1/2% relative humidity.
- Removes oil mist down to .01 micron.
- Removes particulates down to .01 micron.
- Low pressure drop.

### Specifications of Air Guardian<sup>2</sup>





Part #	Capacity @ 100 PSIG	Air In/Out	Length	Width	Weight	Operating Pressure	Ambient Temp Rating
080-222	25 SCFM	1/4"	15"	5"	4.4 lbs	200 PSIG	200 °F



# Replaceable Desiccant Cartridge

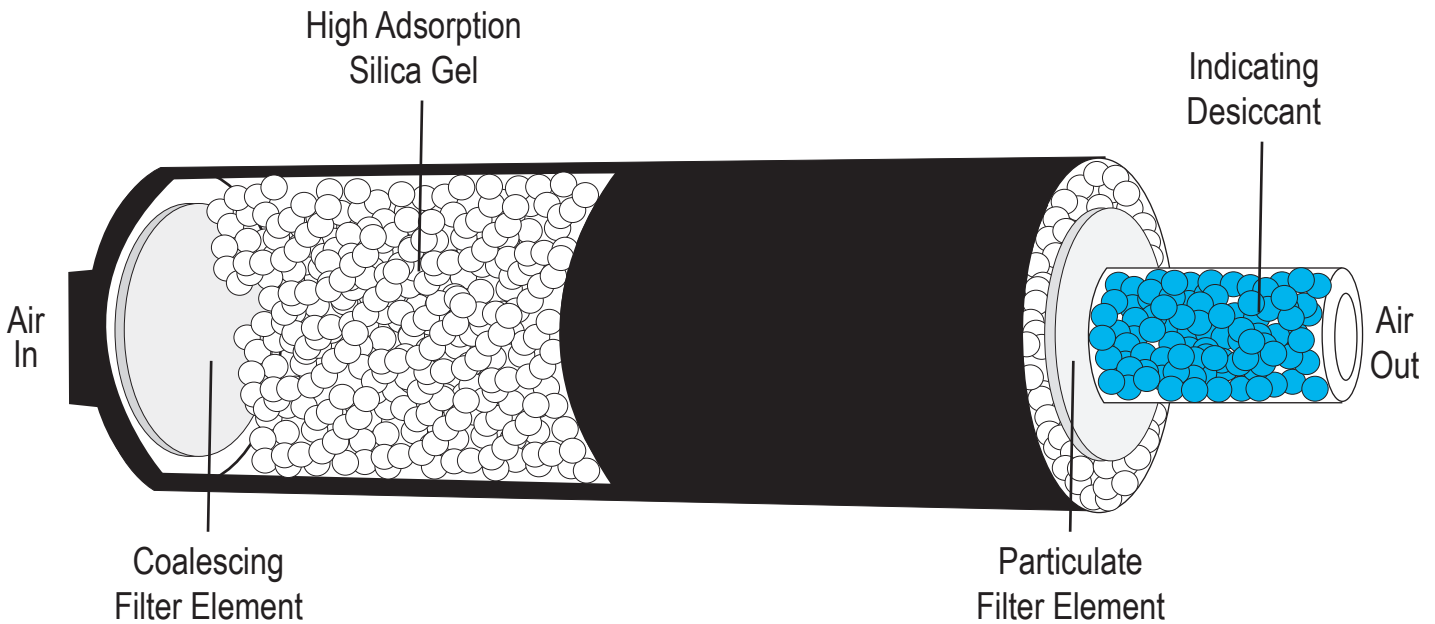

## 4 easy steps to replace the cartridge

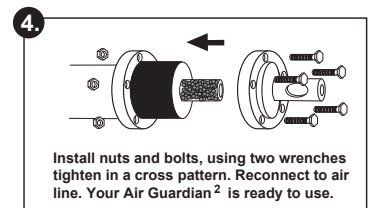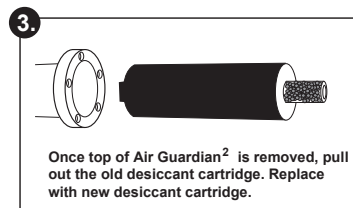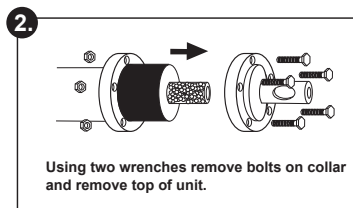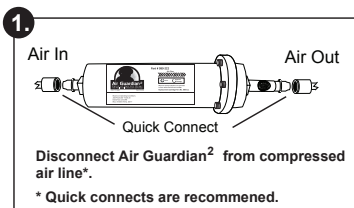

### Ordering Information

Part #	Description
080-222	Air Guardian <sup>2</sup> Desiccant Air Dryer
080-111	Replaceable Desiccant Cartridge

**Eastern Air Products**  
800-943-7924  
fax 716-741-1724

